

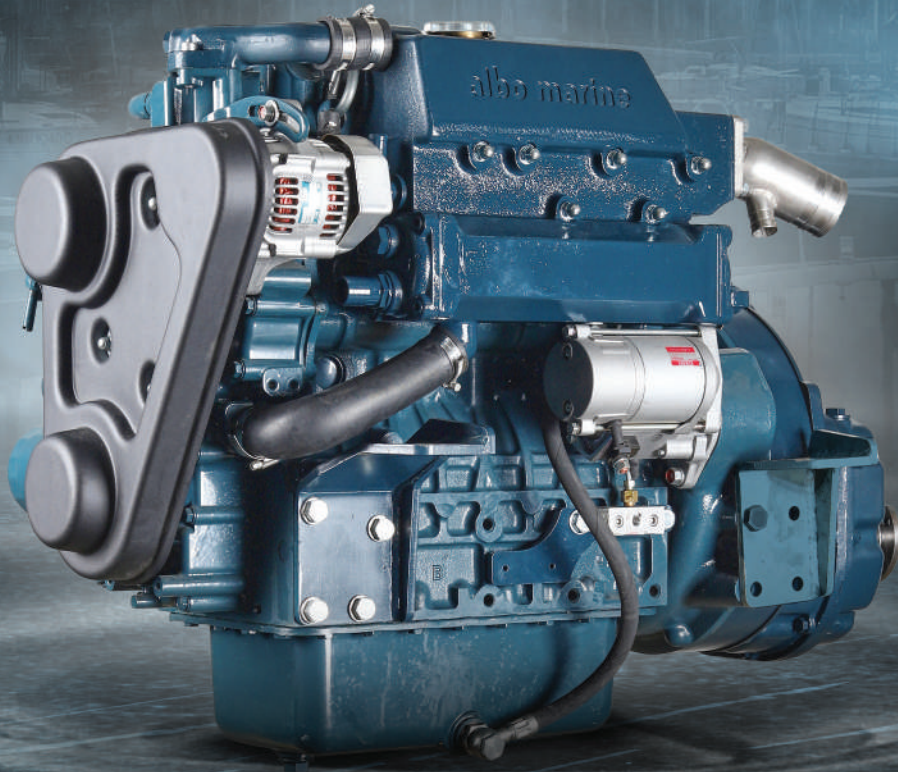


albo marine®

AB149
CATALOGUE

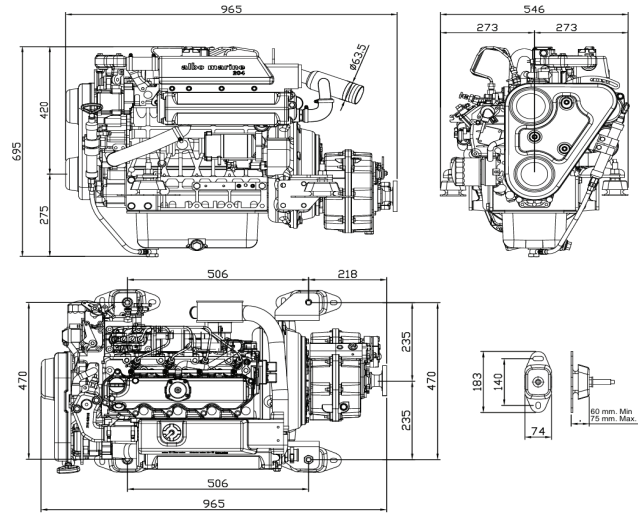

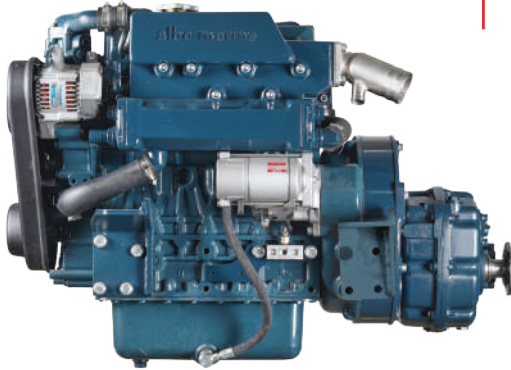

EQUIPMENT

Standart Equipment

Analog Control Panel

Vibration Wedge

Operator Manual

Optional Equipment

Digital Control Panel

Flange

Flexible Coupling

24 V Electrical system

Throttle and Shift Controls

Extension Harness

Dry Exhaust

TECHNICAL SPECIFICATIONS

Base	Kubota
Type	Vertical, water cooled 4-cycle IDI diesel engine
Cylinders	4
Bore x Stroke - mm(in)	87.0 x 102.4 (3.43 x 4.031)
Aspiration	Naturally Aspirated
Displacement - L (cu.in)	2.434 (148)
Compression Ratio	23.2
Power Rating	36.5 (49) / 2700
Maximum Torque - Nm (lb-ft) / rpm	158.6 (117.0) / 1600
Fuel Injection Pump Type	In-line pump
Starter (V - kW) / Alternator (V - W)	12 - 2.0 / 12 - 480
Weight* - (kg)	214 KG
ID Ø Salt Water Hose - (mm)	33.7 (1")
ID Ø Diesel Fuel Intake Hose - (mm)	8
ID Ø Diesel Fuel Return Hose - (mm)	6
Length x Width x Height - (mm)	965x546x695

*Without Gearbox

TRANSMISSIONS

Model	Type	Reduction	Engine Weight With Gearbox
PRM	PRM150 - Hydraulic	2.09:1	257 KG
PRM	PRM280 - Hydraulic	1.96:1	290 KG
PRM	PRM260C - In-line Hydraulic	2.94:1	299 KG

PERFORMANCE

