



albo marine®

AB180
CATALOGUE

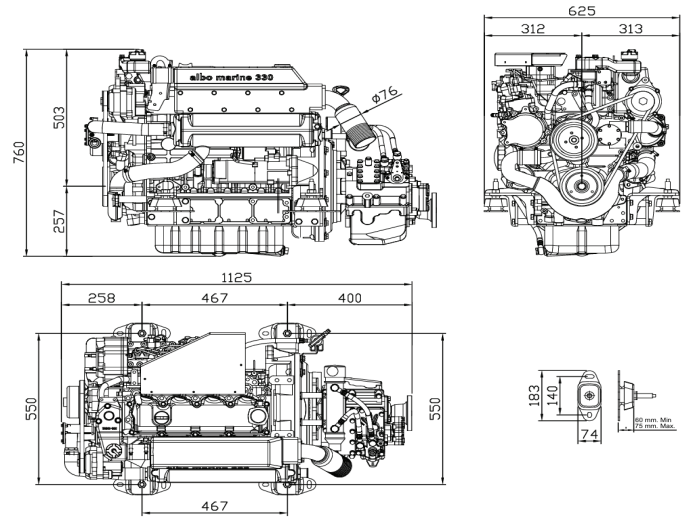

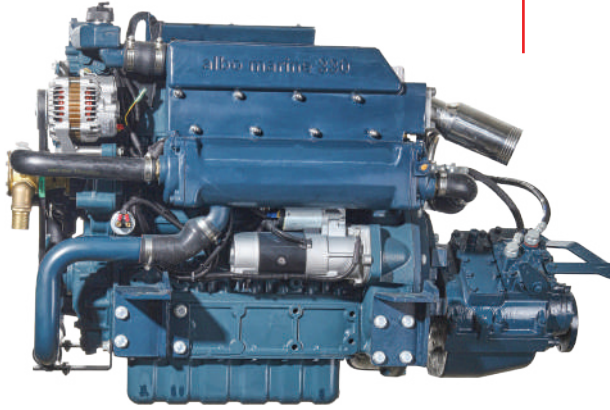

EQUIPMENT

Standart Equipment

Analog Control Panel
Vibration Wedge
Operator Manual

Optional Equipment

Digital Control Panel
Flange
Flexible Coupling
24 V Electrical system
Throttle and Shift Controls
Extension Harness
Dry Exhaust

TECHNICAL SPECIFICATIONS

Base	Kubota
Type	Vertical, water cooled 4-cycle IDI diesel engine
Cylinders	4
Bore x Stroke - mm(in)	100.0 x 120.0 (3.937 x 4.724)
Aspiration	Naturally Aspirated
Displacement - L (cu.in)	3.769 (230.0)
Compression Ratio	20
Power Rating	60.8 (80) / 2600
Maximum Torque - Nm (lb-ft) / rpm	270.8 (199.7) / 1500
Fuel Injection Pump Type	In-line pump
Starter (V - kW) / Alternator (V - W)	12 - 3.0 / 12 - 1080
Weight* - (kg)	286 KG
ID Ø Salt Water Hose - (mm)	33.7 (1")
ID Ø Diesel Fuel Intake Hose - (mm)	8
ID Ø Diesel Fuel Return Hose - (mm)	6
Length x Width x Height - (mm)	1125x625x760

*Without Gearbox

TRANSMISSIONS

Model	Type	Reduction	Engine Weight With Gearbox
PRM	PRM280 - Hydraulic	1.96:1	375 KG
PRM	PRM260C - In-line Hydraulic	2.94:1	384 KG
PRM	PRM500 - Hydraulic	1.96:1	389 KG

PERFORMANCE

