


albo marine®

MG 307

CATALOGUE



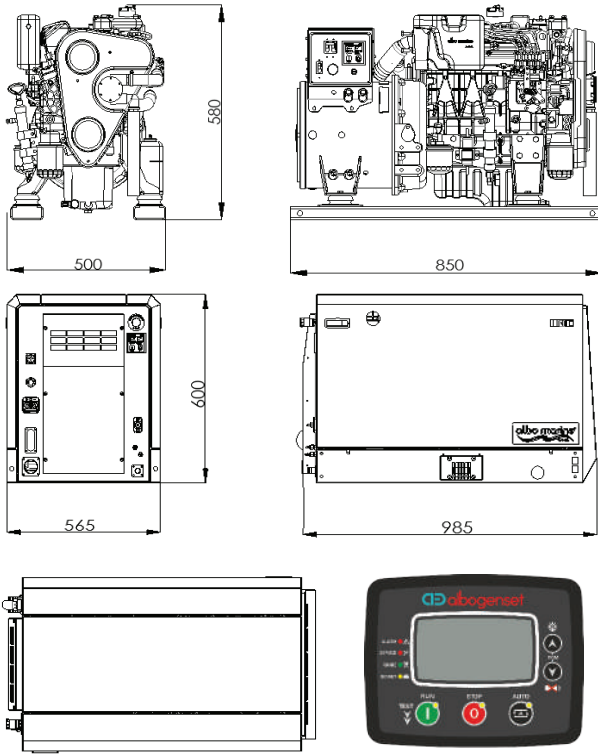

Standart Equipment

- 10m Electrical Extension Lead
- Digital Control Panel
- Waterlock and Siphon Breaker Kit
- Operation and Installation Manual

ALBOSAN Makina San. ve Tic. Ltd. Şti.

Maltepe Mah. Hastane Yolu Sok. 1. Baltaş San. Sitesi
No: 10/3 Zeytinburnu/İstanbul

Tel: +90 212 612 2500

E-mail: info@albosan.com.tr

Fax: +90 212 501 34 65

50 Hz MODEL

60 Hz MODEL

MODEL AND RATINGS

Continuous (kW/kVA)	7.5/7,5	8,7/8,7
Voltage (V)	230	240
Amps (A)	32	38,4
Phases	1	1
Hz	50	60
Engine Rpm	1500	1800
Noise Level (7m / 3m / 1m Db)	59 / 63 / 67	

WEIGHT (KG)

Canopy (Dry)	285
Standard Version (Dry)	228

ENGINE SPECIFICATION

Base	KUBOTA
Type	Vertical, water cooled 4-cycle diesel engine
Cylinders	3
Broke X Stroke (mm)	78.0 x 78.4
Displacement (L)	1.123
Compression Ratio	24,0
Combustion System	Indirect Injection
Aspiration	Natural Aspiration
Lube Oil Capacity (L)	5,1
Coolant Capacity (L)	3,1
Fuel Consumption On Load	3 L/h

ALTERNATOR

Brand	ALBO
Nr. Of Poles	2
Insulation Type	H
Ip Protection	21
Cos Phi	1
Tropicalized	TR
Excitation System	Brushless
Voltage Regulation Accuracy	+/-1%

POWERED BY



www.albosan.com.tr