


albo marine®

MN 305

CATALOGUE



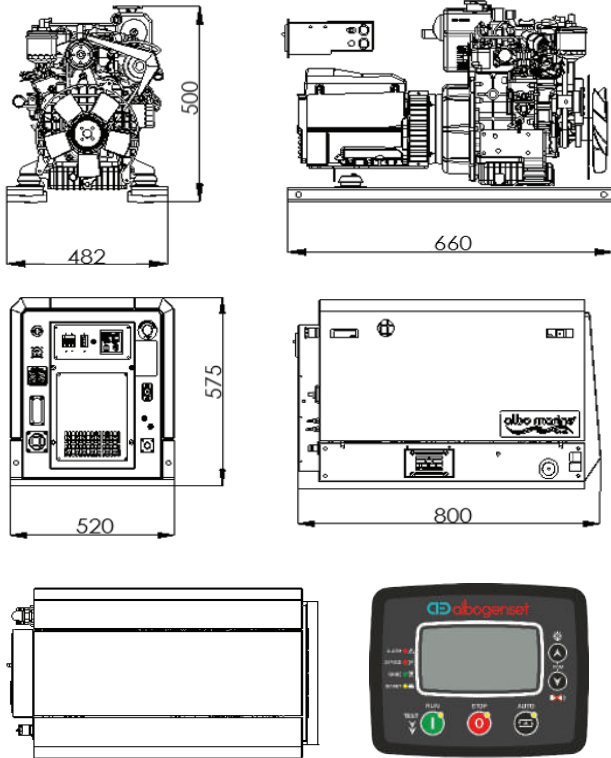

Standart Equipment

- 10m Electrical Extension Lead
- Digital Control Panel
- Waterlock and Siphon Breaker Kit
- Operation and Installation Manual

ALBOSAN Makina San. ve Tic. Ltd. Şti.

Maltepe Mah. Hastane Yolu Sok. 1. Baltaş San. Sitesi
No: 10/3 Zeytinburnu/İstanbul

Tel: +90 212 612 2500

E-mail: info@albosan.com.tr

Fax: +90 212 501 34 65

50 Hz MODEL

60 Hz MODEL

MODEL AND RATINGS

Continuous (kW/kVA)	5,5/5,5	6,8/6,8
Voltage (V)	230	240
Amps (A)	24	28,1
Phases	1	1
Hz	50	60
Engine Rpm	3000	3600
Noise Level (7m / 3m / 1m Db)		61 / 65 / 69

WEIGHT (KG)

Canopy (Dry)	171
Standard Version (Dry)	139

ENGINE SPECIFICATION

Base	KUBOTA
Type	Vertical, water cooled 4-cycle diesel engine
Cylinders	2
Broke X Stroke (mm)	67.0 x 68.0
Displacement (L)	0.479
Compression Ratio	23,5
Combustion System	Indirect Injection
Aspiration	Natural Aspiration
Fuel Consumption On Load	2,3 L/h

ALTERNATOR

Brand	NSM
Nr. Of Poles	2
Insulation Type	H
Ip Protection	23
Cos Phi	1
Tropicalized	IT
Excitation System	Brushless
Voltage Regulation Accuracy	+5% (cosQ = 1)

POWERED BY



www.albosan.com.tr